

Ledionopto



Glory

Series



Track Light

Wall Light

Pendant Light

The professional choice for replacing Metal Halide.

The Glory series comes with an integrated driver box that fits perfectly within the heatsink.





Wall Light

The decorative light of the Glory series illuminates the environment with a soothing atmosphere. The Glory family can be applied in shopping malls, indoor hallways, and restaurants everywhere



Available in
Black.



Glare-less & High Quality Light

On the optical side, the Glory series is designed with COB plus reflector and lens, rather than the traditional reflector and glass combination. By removing glass and adding lens, the Glory series can illuminate the environment with high efficiency at the same time providing an anti glare effect. The choice of COB rather than multi LED can prevent having blurriness and unclearness on the projected object.




Single-LED (COB) - light effect on object is soft and even.



Multi-LED - Light effect on object is blurry and unclear with double images.

Track Light

■ Dimensions

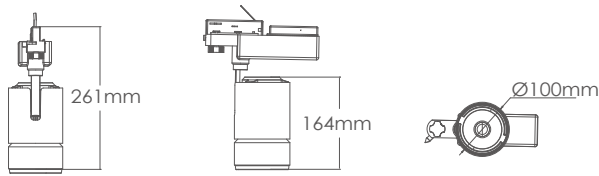

Tolerance: ± 2.5 mm

■ Technical Specifications

Parameter	Rating
Power Consumption	31W
Color Temperature	3000K/4000K/5700K
VLED,ILED	AC110V-277V
CRI	80
Lumen(typ)	3500
BeamAngle	15°/25°/35°
Lux(typ)	16800/13100/8300
Weight	1310g
Operating Temperature	-20°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Lamp Power Factor	By Used Driver
Quick light / Instant light	<1s Instant full light
Dimmable	Option by driver
Switching cycles	>100,000 times
UGR	<19

※ Do not use in enclosed fixture.

※ This product is assembled with an LED of 3 SDCM for 3000K, 4000K and 5700K.

■ Nomenclature


GRTL00 - 31 1 30 1 B 1

X1 X2 X3 X4 X5 X6 X7

X1 Product name	X2 Wattage	X3 BeamAngle	X4 CCT
GRTL00=Glory Track Light	31=31W	1=15° 2=25° 3=35°	30=3000K 40=4000K 57=5700K
X5 Cover+Heat sink	X6 Remark	X7 Type	
1=White+White 5=Black+Black	A= 3 cricuit 4 pins B= 1 cricuit 3 pins C= 1 cricuit 2 pins	1=Tilt Round	

■ Light Patterns

The diagrams present the light patterns with respect to different color temperature and angles.

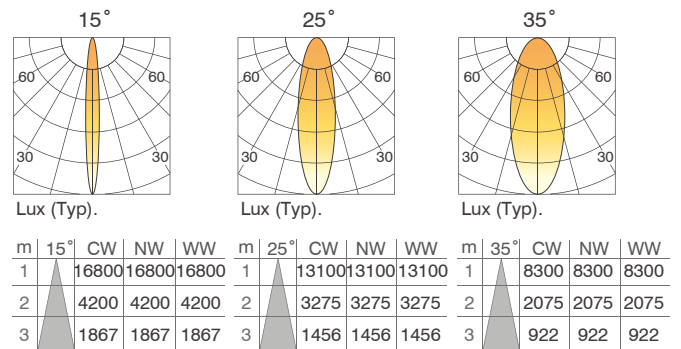

Light patterns of Glory series for different angles.

Single side Wall Light

■ Dimensions



Tolerance: ± 2.5 mm

■ Technical Specifications


Parameter	Rating
Power Consumption	9W
Color Temperature	3000K/4000K/5700K
VLED,I,LED	AC100-240V
CRI	80
Lumen(typ)	900
BeamAngle	15°/20°/35°
Weight	600g
Lux(typ)	8100/4000/2000
Operating Temperature	-20°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Lamp Power Factor	By Used Driver
Quick light / Instant light	<1s Instant full light
Dimmable	Option by driver
Switching cycles	>100,000 times

※ Do not use in enclosed fixture.

※ This product is assembled with an LED of 3 SDCM for 3000K, 4000K and 5700K.

■ Light Patterns

The diagrams present the light patterns with respect to different color temperature and angles.

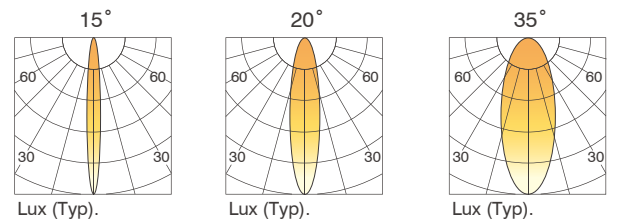

m	15°	CW	NW	WW	m	20°	CW	NW	WW	m	35°	CW	NW	WW
1	8100	8100	8100	8100	1	4000	4000	4000	4000	1	2000	2000	2000	2000
2	2050	2050	2050	2050	2	1000	1000	1000	1000	2	500	500	500	500
3	900	900	900	900	3	444	444	444	444	3	222	222	222	222

Light patterns of Glory series for different angles.

■ Nomenclature


GRWL00 - 09 1 30 1 1 3

X1 X2 X3 X4 X5 X6 X7

X1 Product name	X2 Wattage	X3 BeamAngle	X4 CCT
GRWL00=Glory Wall Light	09=09W	1=15° 2=20° 3=35°	30=3000K 40=4000K 57=5700K
X5 Cover+Heat sink	X6 Remark	X7 Type	
1=White+White 5=Black+Black	1=Standard	3=Fixed Round	

Double side Wall Light

■ Dimensions



Tolerance: ± 2.5 mm

■ Technical Specifications


Parameter	Rating
Power Consumption	12W
Color Temperature	3000K/4000K/5700K
VLED,I _{LED}	AC100-240V
CRI	80
Lumen(typ)	1350
BeamAngle	15°/20°/35°/(Flood)
Weight	1000g
Operating Temperature	-20°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Lamp Power Factor	By Used Driver
Quick light / Instant light	<1s Instant full light
Dimmable	Option by driver
Switching cycles	>100,000 times

※ Do not use in enclosed fixture.

※ This product is assembled with an LED of 3 SDCM for 3000K, 4000K and 5700K.

■ Light Patterns

The diagrams present the light patterns with respect to different color temperature and angles.

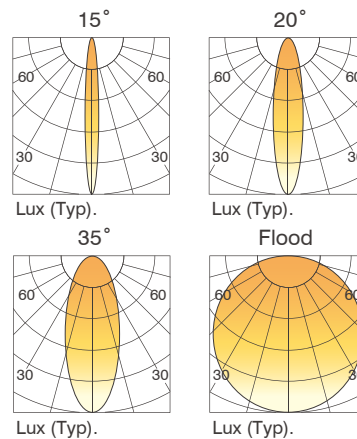

Light patterns of Glory series for different angles.

■ Nomenclature


GRWL00 - 12 1 30 1 F 3

X1 X2 X3 X4 X5 X6 X7

X1 Product name	X2 Wattage	X3 BeamAngle	X4 CCT
GRWL00=Glory Wall Light	12=12W	1=15° 2=20° 3=35°	30=3000K 40=4000K 57=5700K
X5 Cover+Heat sink	X6 Remark	X7 Type	
1=White+White 5=Black+Black	F= Double Side	3=Fixed Round	

Pendant Light

■ Dimensions

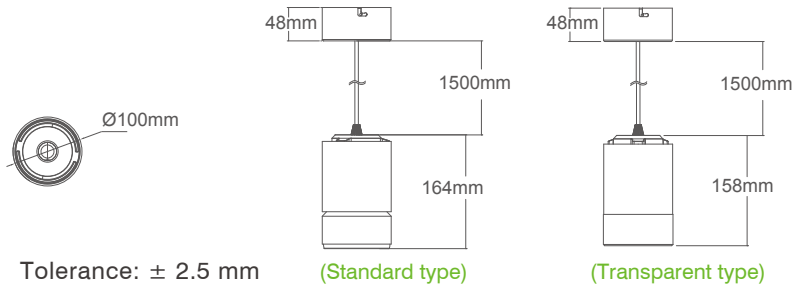

■ Technical Specifications


Parameter	Rating
Power Consumption	24W
Color Temperature	3000K/4000K/5700K
VLED,ILED	AC100V-240V
CRI	80
Lumen(typ)	2700
BeamAngle	15°/25°/35°/Flood
Lux(typ)	13500/10100/6400/NA
Weight	1310g
Operating Temperature	-20°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Lamp Power Factor	By Used Driver
Quick light / Instant light	<1s Instant full light
Dimmable	Option by driver
Switching cycles	>100,000 times
UGR	<19

※ Do not use in enclosed fixture.

※ This product is assembled with an LED of 3 SDCM for 3000K, 4000K and 5700K.

■ Light Patterns

The diagrams present the light patterns with respect to different color temperature and angles.

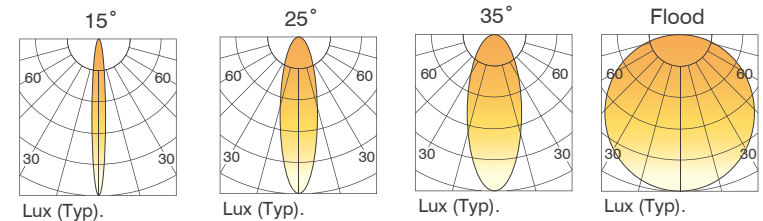

Light patterns of Glory series for different angles.

■ Nomenclature


GRPD00 - 24 2 30 1 1 3

X1 X2 X3 X4 X5 X6 X7

X1 Product name	X2 Wattage	X3 BeamAngle	X4 CCT
GRPD00=Glory Pendant Light	24=24W	1=15° 2=25° 3=35° F=Flood	30=3000K 40=4000K 57=5700K
X5 Cover+Heat sink	X6 Remark	X7 Type	
1=White+White 5=Black+Black	1=Standard 4=Transparent(X3=F)	3=Fixed Round	

■ Package information


Glory / Track Light

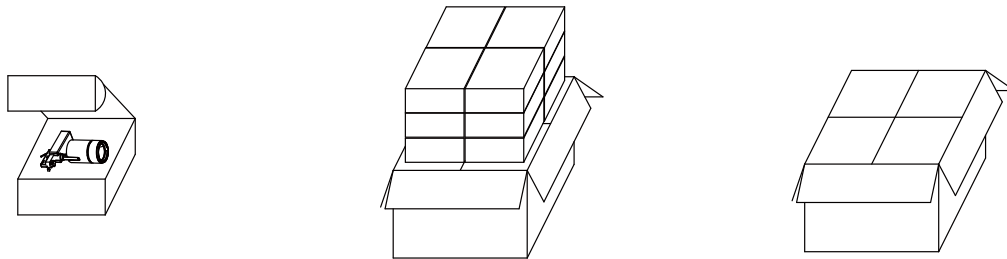

Interior Box Dimensions : (L)305x(W)236x(H)125mm
Carton Dimensions : (L)627x(W)490x(H)410mm

12 pcs/carton


Glory / Single side Wall light

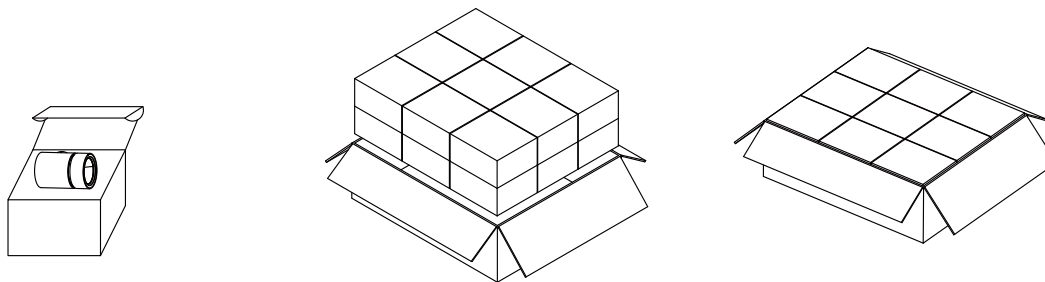

Interior Box Dimensions : (L)160x(W)163x(H)125mm
Carton Dimensions : (L)500x(W)508x(H)282mm

18 pcs/carton

Glory / Double side Wall light



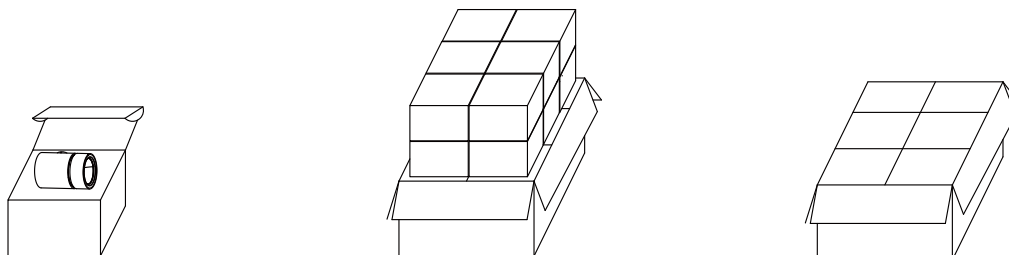


Interior Box Dimensions : (L)207x(W)163x(H)125mm
Carton Dimensions : (L)508x(W)432x(H)282mm

12 pcs/carton

■ Package information

Glory / Pendant Light



Interior Box Dimensions : (L)365x(W)146x(H)125mm
Carton Dimensions : (L)380x(W)457x(H)410mm

9 pcs/carton