



Multi-pro^{Series}

Track Light & Robot Light



+Honey comb version
(12W/31W Track Light)

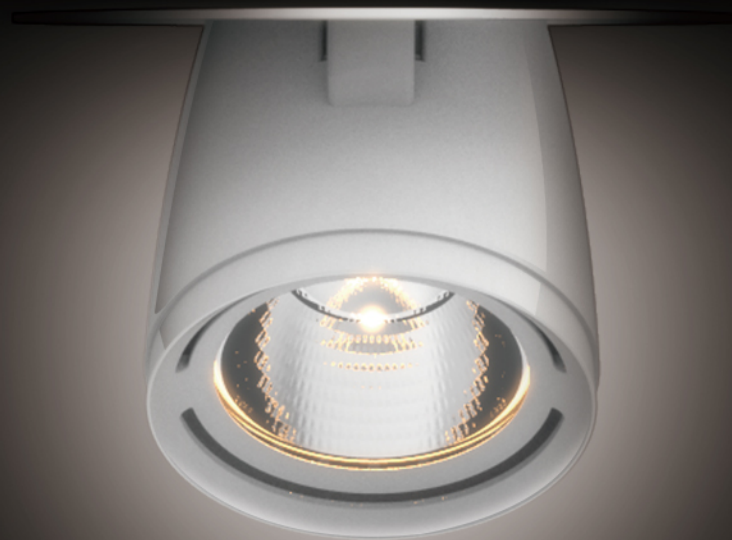

12W Track Light

31W Track Light

31W Robot Light



The exquisite choice for replacing Metal Halide

The Multi-Pro series comes in a set of both track light and robot light, completing the same environment with a Serial design.

The uniqueness of the Multi-Pro series lies in the petite lamp body in comparison to most of the metal halide replacements in the market. The secret lies in the heatsink design of our R&D team who seek the perfect balance between form and function. Aside from the lamp body itself, the gear box of the track light is also in a proportionally small size.


The exquisitely small design of the lamp is not only important in terms of aesthetics, but also decreases the limitations due to restricted ceiling spaces when used as a robot light downlight.



Track Light

For the track light, customers can easily adjust the lamp vertically by 90deg and horizontally by 355deg, illuminating the right spot with precision.



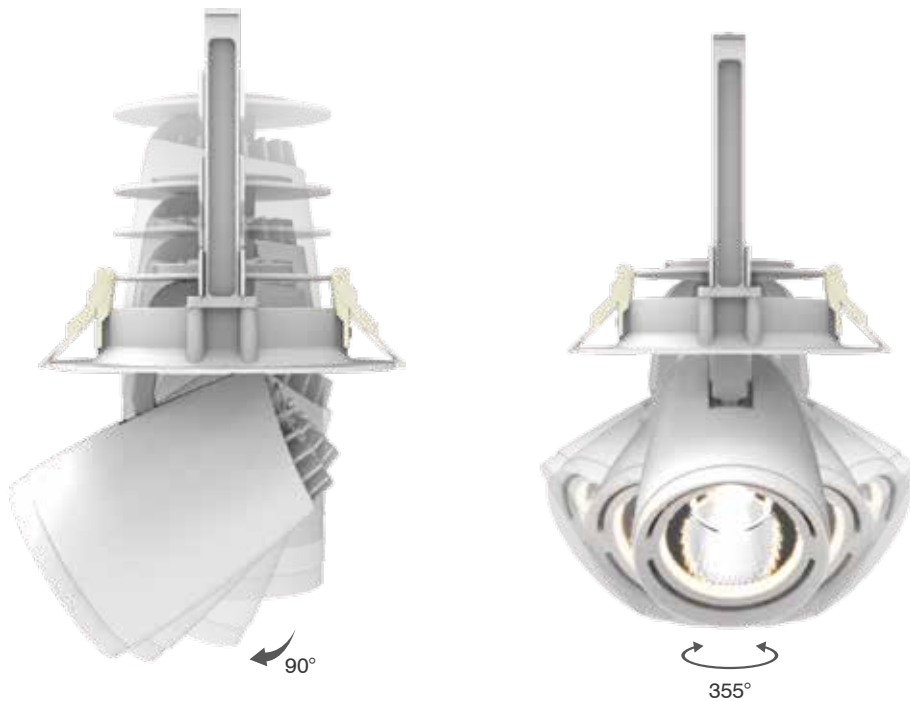

Multiple Uses



1. Down Light



2. Ceiling Light




3. Spot Light

Robot Light

The robot light serves multiple functions as a downlight, pulling down to a ceiling-mounted light and adjusting to different directions as a spot light. The flexibility of pulling out 90deg and turning horizontally by 355deg makes it possible for one store to use the same lamp according to their needs. The various functions of the robot light also means adapting easily to the furnishing changes in an environment.



Brightness comparison

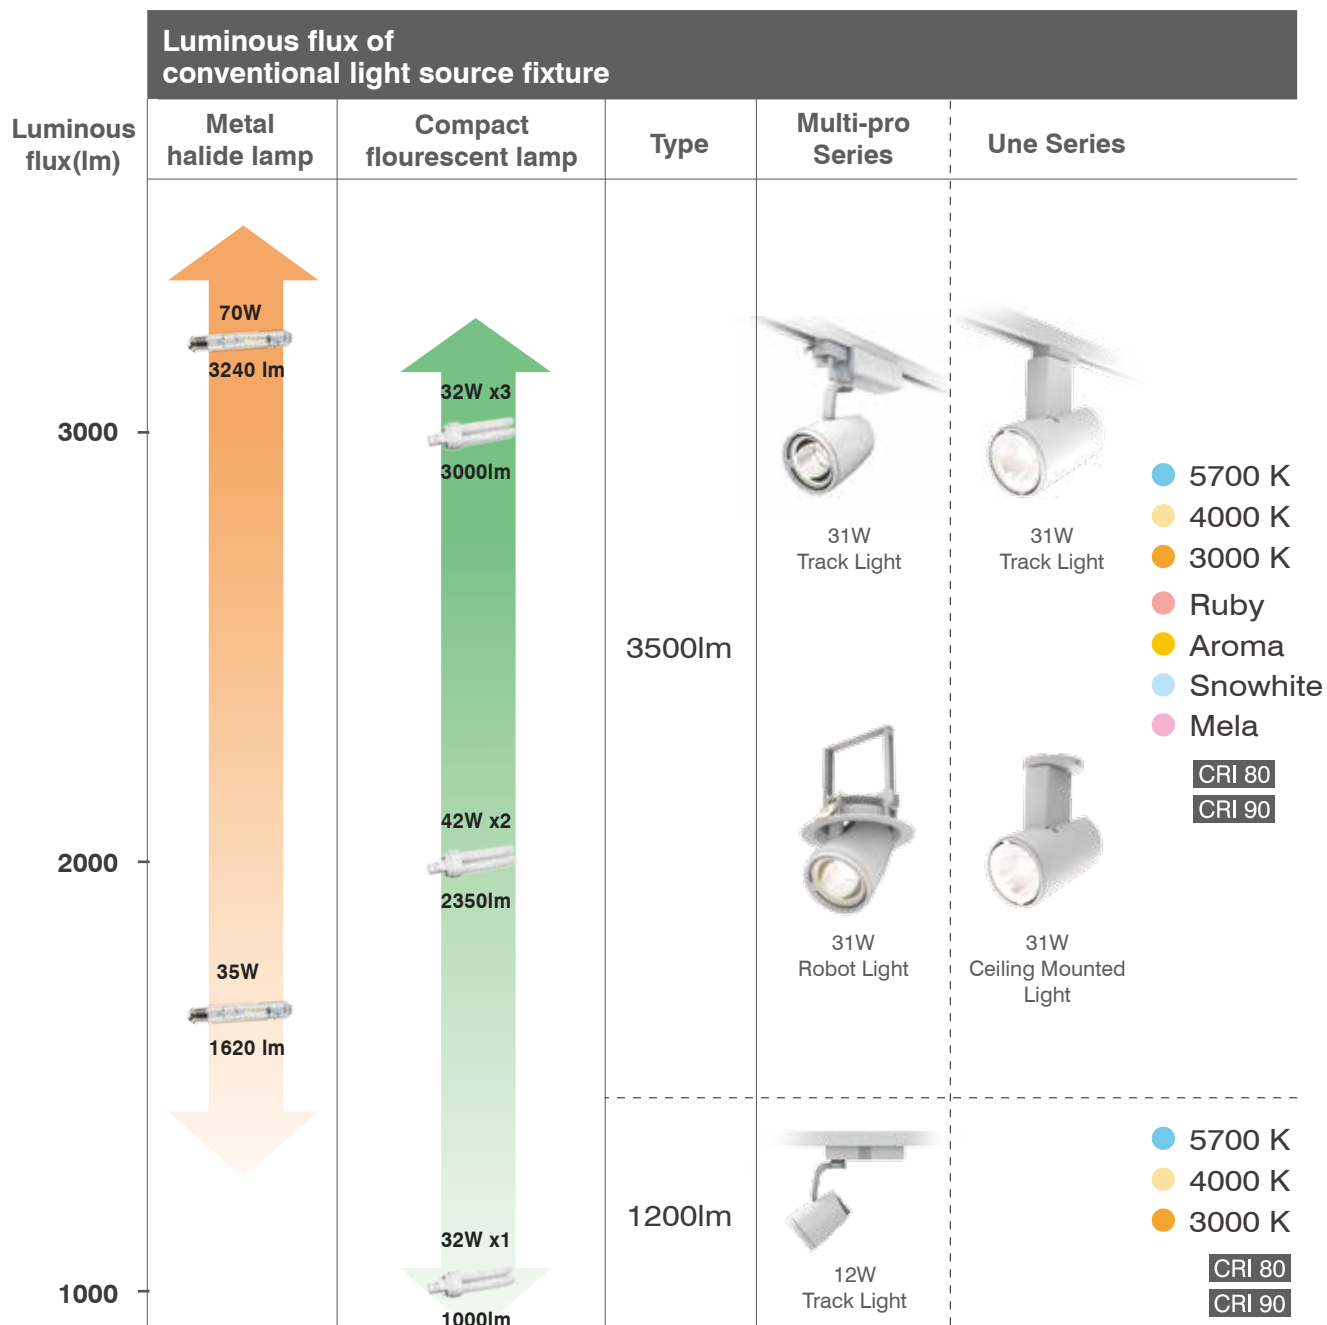


※ Values in chart shows the values of luminous flux of fixtures.

※ The other Track Light/Celing Mounted Light-UNE Series please follow its datasheet.

12W Track Light

■ Dimensions

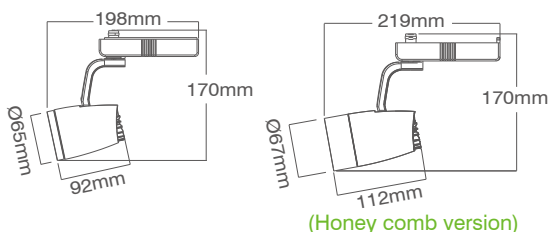


■ Technical Specifications

Parameter	Rating
Power Consumption	12W
Color Temperature	3000K/4000K/5700K
V _{LED, I_{LED}}	100V~240V
CRI	80
Lumen(typ)-Standard	1200
Lumen(typ)-Honey Comb	800
BeamAngle	15°/25°/38°
Lux(typ)-Standard	6200/3600/2200
Lux(typ)-Honey Comb	5000/3400/2100
Weight (Standard/Honey Comb)	435g/480g
Operating Temperature	-20°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Lamp Power Factor	>0.9
Quick light / Instant light	<1s Instant full light
Dimmable	N/A
Switching cycles	>100,000 times
UGR	<19

※ This product is assembled with an LED of 3 SDCM for 3000K, 4000K and 5700K.

■ Light Patterns

The diagrams present the light patterns with respect to different color temperature and angles.

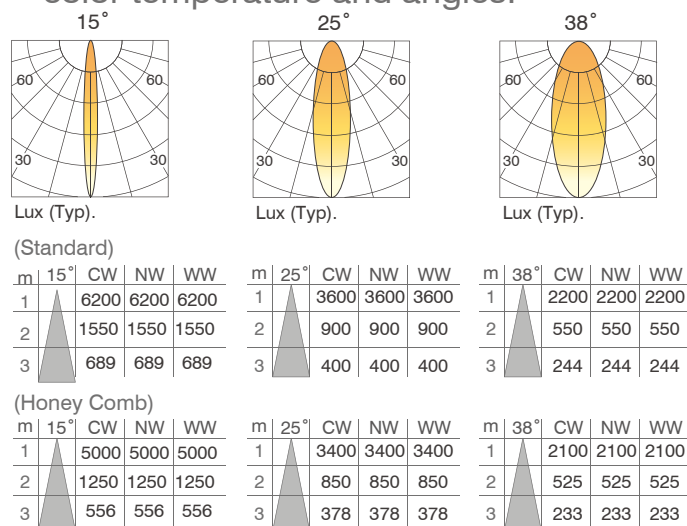

Light patterns of 12W Track Light for different angles.

■ Nomenclature


MPTL00 - 12 1 30 2 B 1

X1 X2 X3 X4 X5 X6 X7

X1	X2	X3	X4
Product name	Wattage	BeamAngle	CCT
MPTL=Multi-pro TrackLight	12=12W	1=15° 2=25° 3=38°	30=3000K 40=4000K 57=5700K
X5	X6	X7	Note/ Serial Number
Cover+Heat sink	Remark	Type	
1=White+White 2=Beige+Beige 5=Black+Black	B= 1 cricuit 3 pins C= 1 cricuit 2 pins	1=Standard	01=Glass+Standard cover 02=HoneyComb+Glareless cover 03=HoneyComb+Glass+Glareless cover 04=Glass+Glareless cover

31W Track Light

■ Dimensions

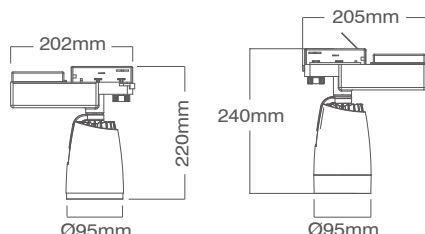

Tolerance: ± 2.5 mm (Honey comb version)


■ Technical Specifications

Parameter	Rating
Power Consumption	31W
Color Temperature	3000K/4000K/5700K
VLED,ILED	110~277V
CRI	80
Lumen(typ)-Standard	3500
Lumen(typ)-Honey Comb	2300
BeamAngle	15°/25°/38°
Lux(typ)-Standard	15000/9800/6600
Lux(typ)-Honey Comb	14100/9300/6250
Weight (Standard/Honey Comb)	1245g/1380g
Operating Temperature	-20°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Lamp Power Factor	By Used Driver
Quick light / Instant light	<1s Instant full light
Dimmable	Option by driver
Switching cycles	>100,000 times
UGR	<19

※ This product is assembled with an LED of 3 SDCM for 3000K, 4000K and 5700K.

■ Light Patterns

The diagrams present the light patterns with respect to different color temperature and angles.

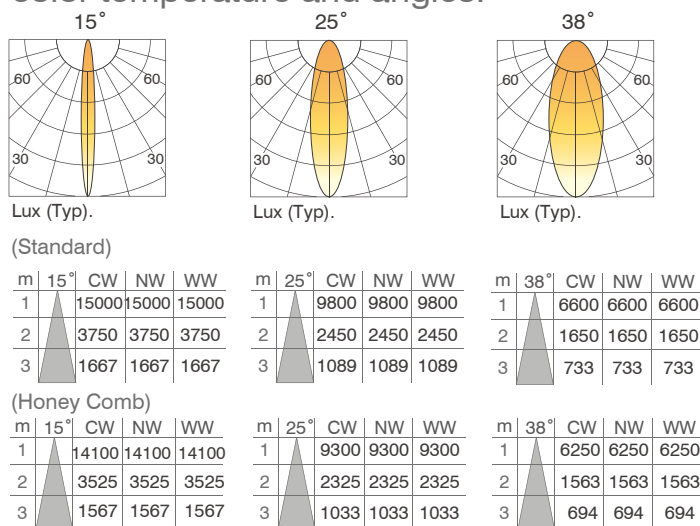

Light patterns of 31W Track Light for different angles.

■ Nomenclature


MPTL00 - 31 1 30 2 B 1

X1 X2 X3 X4 X5 X6 X7

X1 Product name	X2 Wattage	X3 BeamAngle	X4 CCT
MPTL=Multi-pro TrackLight	31=31W	1=15° 2=25° 3=38°	30=3000K 40=4000K 57=5700K
X5 Cover+Heat sink	X6 Remark	X7 Type	Note/ Serial Number
1=White+White 2=Beige+Beige 5=Black+Black	A= 3 circuit 4 pins B= 1 circuit 3 pins C= 1 circuit 2 pins	1=Standard	01=Glass+Standard cover 02=HoneyComb+Glareless cover

31W Robot Light

■ Dimensions

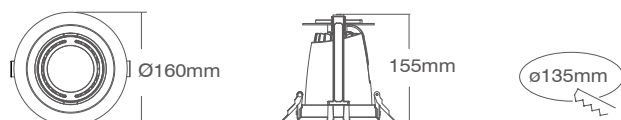

Tolerance: ± 2.5 mm

■ Technical Specifications

Parameter	Rating
Power Consumption	31W
Color Temperature	3000K/4000K/5700K
VLED,ILED	DC 38V,900mA
CRI	80
Lumen(typ)	3500
BeamAngle	15°/25°/38°
Lux(typ)	15000/9800/6600
Weight	1020g
Operating Temperature	-20°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Lamp Power Factor	By Used Driver
Quick light / Instant light	<1s Instant full light
Dimmable	Option by driver
Switching cycles	>100,000 times
UGR	<19


※ Luminous flux shows the data of module.

※ Do not use in enclosed fixture.

※ This product is assembled with an LED of 3 SDCM for 3000K, 4000K and 5700K.

■ Light Patterns

The diagrams present the light patterns with respect to different color temperature and angles.

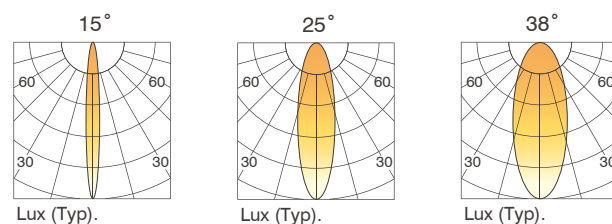

m	15°	CW	NW	WW	m	25°	CW	NW	WW	m	38°	CW	NW	WW
1	15000	15000	15000	15000	1	9800	9800	9800	9800	1	6600	6600	6600	6600
2	3750	3750	3750	3750	2	2450	2450	2450	2450	2	1650	1650	1650	1650
3	1667	1667	1667	1667	3	1089	1089	1089	1089	3	733	733	733	733

Light patterns of 31W Robot Light for different angles.

■ Nomenclature




MPRL00 - 31 1 30 2 1 1

X1 X2 X3 X4 X5 X6 X7

X1	X2	X3	X4
Product name	Wattage	BeamAngle	CCT
MPTL=Multi-pro RobotLight	31=31W	1=15°	30=3000K
		2=25°	40=4000K
		3=38°	57=5700K
X5	X6	X7	
Cover+Heat sink	Remark	Type	
1=White+White 2=Beige+Beige 5=Black+Black	1=Standard	1=Tilt Round	

■ Package information




12W Track Light

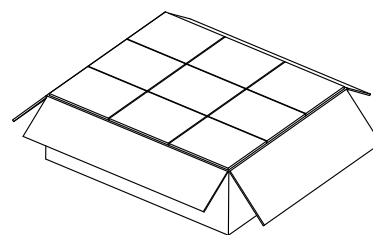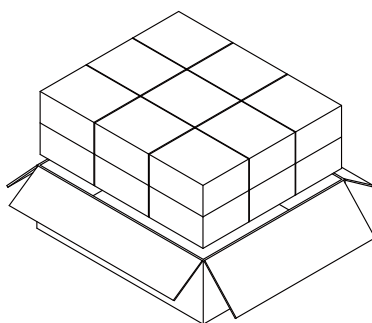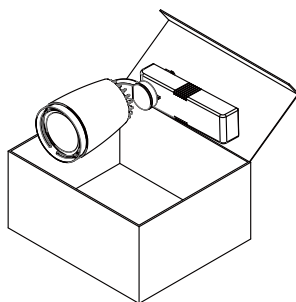

Interior Box Dimensions : (L)197x(W)168x(H)85mm
Carton Dimensions : (L)413x(W)525x(H)286mm

18 pcs / Carton




12W Honey Comb Track Light

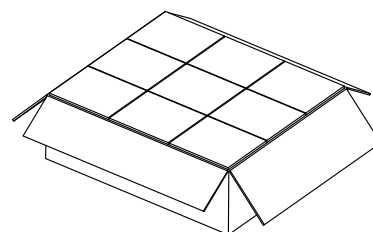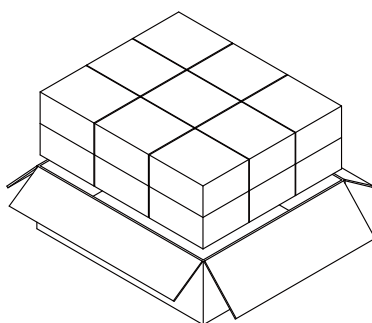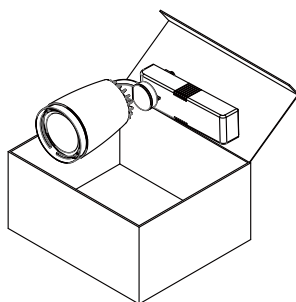

Interior Box Dimensions : (L)216x(W)186x(H)95mm
Carton Dimensions : (L)451x(W)580x(H)315mm

18 pcs / Carton

31W Track Light/ Honey Comb Track Light

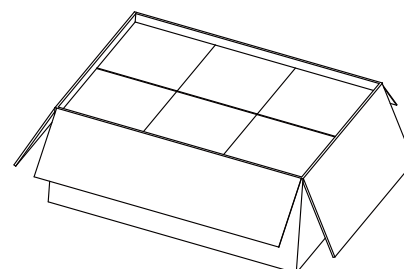
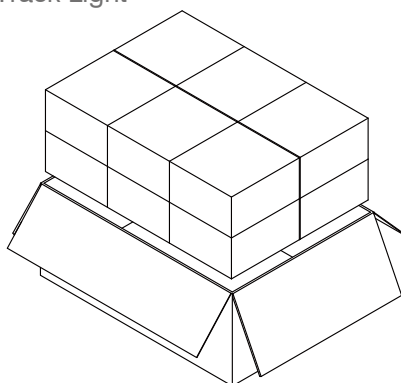
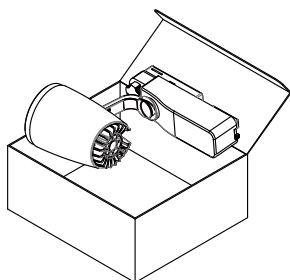


Interior Box Dimensions : (L)255x(W)225x(H)120mm
Carton Dimensions : (L)530x(W)470x(H)390mm

12 pcs / Carton

■ Package information

31W Robot Light

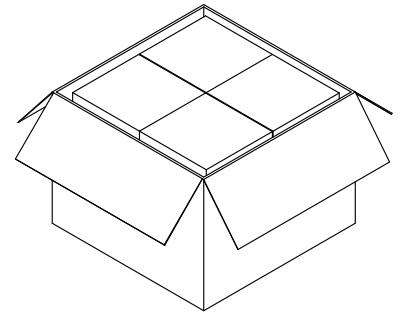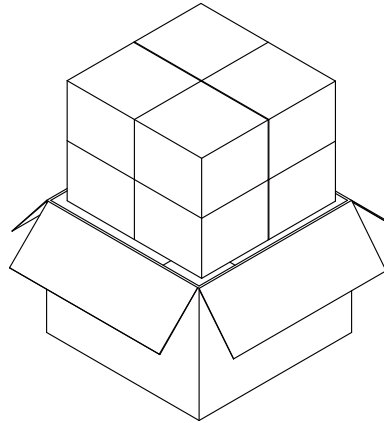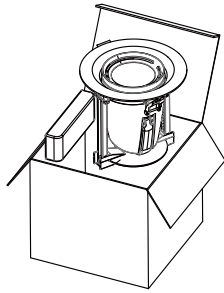

Interior Box Dimensions : (L)231x(W)186x(H)197mm
Carton Dimensions : (L)485x(W)391x(H)423mm

8 pcs / Carton