

## Features

- Applying vehicle CANBUS can increase fitting rate which reaches 99.5%.
- EMC ECE E9 certificate approved
- Brighter +150% up
- CANBUS-free 合车率99.5%
- 符合ECE EMC E9认证
- 符合卤素灯光型设计
- 亮度提升+150%以上

## Packing Box



## Certificate



**Ledionopto** is a company dedicated in creating professional, high quality solid state lighting products since 2008 in New Taipei City, Taiwan. With proficiencies in LED technology, Optical, Mechanical, Thermal and Electrical engineering, all of Ledionopto products are designed to carry the highest industry standards in terms of performance and reliability. Due to the various demand by customers, Ledionopto Lighting has establish a factory in Dongguan in order to expand our product line and satisfy these unmet marketsneeds.

Our production line is not only devoted to create products with unprecedented efficacy and aesthetics to satisfy even the most demanding lighting scenarios, but also to contribute to the environment by providing an environmentally responsible LED product.



# Ledionopto

9F-1, No.800, Zhongzheng Rd., Zhonghe Dist., New Taipei City 23586, Taiwan

Tel: +886-2-8226-7227  
<http://www.ledionopto-lighting.com>  
 E-mail: sales@ledionopto-lighting.com



Copyright © 2017 Ledionopto Lighting. All rights reserved.

# LDS 1&2 Series




ECE-EMC CE

IP 65

## Architecture diagram



## LDS Series V.S. Halogen

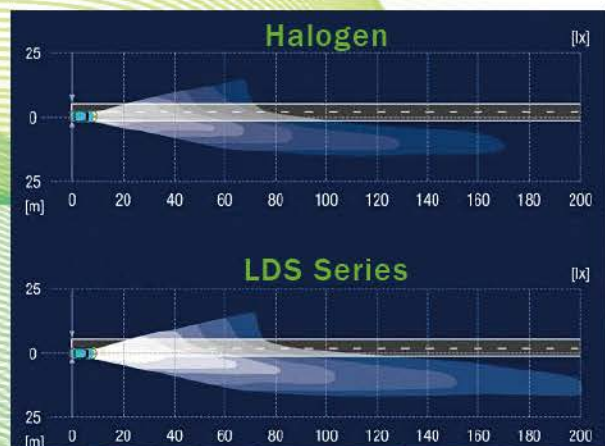

## LDS1-H1

Power (功率) : 25W Single Beam  
Flux Output (流明) : 3,500lm  
LED Chip (芯片) : 6PCS Philips Lumileds Z ES  
Voltage (电流) : 12-24V  
Housing Material (材质) : 6063 Aluminum  
Fanless, Aerodynamical Heat  
Cooling System with Nana Cooling Coating.  
(无风扇, 采用奈米散热材质)



## LDS1-H4

Power (功率) : 25W High Beam/ Low Beam  
Flux Output (流明) : 4,500lm  
LED Chip (芯片) : 12PCS Philips Lumileds Z ES  
Voltage (电流) : 12-24V  
Housing Material (材质) : 6063 Aluminum  
Fanless, Aerodynamical Heat  
Cooling System with Nana Cooling Coating.  
(无风扇, 采用奈米散热材质)



High Beam  
远光



Low Beam  
近光

## LDS2-H1

Power (功率) : 25W Single Beam  
Flux Output (流明) : 3,500lm  
LED Chip (芯片) : 6PCS Philips Lumileds Z ES  
Voltage (电流) : 6-18V/ 12-24V  
Housing Material (材质) : 6063 Aluminum  
Fanless, Copper-strip Heat Sink  
(散热铜带设计)



## LDS2-H4

Power (功率) : 25W High Beam/25W Low Beam  
Flux Output (流明) : 4,500lm  
LED Chip (芯片) : 12PCS Philips Lumileds Z ES  
Voltage (电流) : 6-18V/ 12-24V  
Housing Material (材质) : 6063 Aluminum  
Fanless, Copper-strip Heat Sink  
(散热铜带设计)



High Beam  
远光



Low Beam  
近光

## LDS1-H7

Power (功率) : 25W Single Beam  
Flux Output (流明) : 4,500lm  
LED Chip (芯片) : 6PCS Philips Lumileds Z ES  
Voltage (电流) : 12-24V  
Housing Material (材质) : 6063 Aluminum  
Fanless, Aerodynamical Heat  
Cooling System with Nana Cooling Coating.  
(无风扇, 采用奈米散热材质)



## LDS2-H7

Power (功率) : 25W Single Beam  
Flux Output (流明) : 4,500lm  
LED Chip (芯片) : 6PCS Philips Lumileds Z ES  
Voltage (电流) : 6-18V/ 12-24V  
Housing Material (材质) : 6063 Aluminum  
Fanless, Copper-strip Heat Sink  
(散热铜带设计)

